

ACCESS HOLDINGS INTERNATIONAL  
1300 220 500  
+61 2 9749 5686

access@ahiholdings.com  
www.ahiholdings.com



# Up-Lift®

## Personnel Lift

## UT Series

### Multi Mast

- Capacity to carry 1 to 2 persons
- Rated load up to 200kg, generally higher than single person models
- Larger 2 person platform size\*
- AC or DC Powered
- Standard doorway access for UT20/23/26/33/36
- Safe and reliable, Complies with relevant standards
- Choice of 9 standard platform heights from 6m to 18m

**UT20 6 metres**

**UT23 7 metres**

**UT26 8 metres**

**UT33 10 metres**

**UT36 11 metres**

**UT40 12 metres**

**UT46 14 metres**

**UT52 16 metres**

**UT58 18 metres**

Other platform heights made to order

\* 1.5 x 0.7m for UT20, UT23, UT26

\* 1.7 x 0.7m for UT33, UT36, UT40

\* 1.9 x 0.7m for UT46, UT52

\* 2.0 x 0.8m for UT58

Up-Lift




### Key Features:

- Up to two person capacity \*
- Larger Platform area
- Descend alarm
- Outrigger indicator lights ensuring safe operation
- AC or Battery power  
Battery charger included in DC models
- Smaller models under 2 metres stored height
- Back-up power for emergency power down
- Highly reliable electric powered hydraulic system
- Flashing light indicating operating mode
- Laser position locator
- Hour meter
- AC power outlet on platform
- Optional / Tilt sensor audible with flashing lights
- Optional / Extended platform cage
- 1 year parts & labour
- 5 year structural warranty

### Application:

Up-Lift UT elevated work platforms are extensively used for cleaning, decorating, painting, maintenance and aerial signage work in hotels, restaurants, department stores, emporiums, shopping centers, airport departure halls, sports stadiums, auditorium and convention centres, as well as factories and aircraft hangers. The smaller models are designed to pass through standard doorways and elevator lifts and is especially suited to small confined working space applications, where two people are required on the platform at any one time.

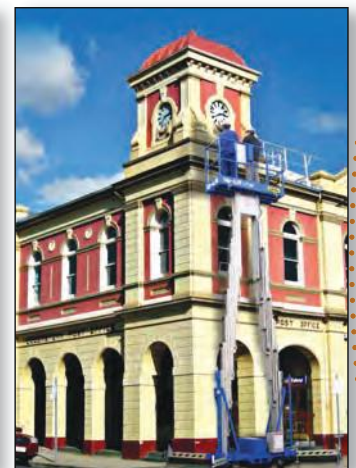

### Technical Specifications

Model	UT20	UT23	UT26	UT33	UT36	UT40	UT46	UT52	UT58
Max Platform Height (m) H	6.1	7.2	8.0	10.1	11.0	12.3	14.2	16.0	18.0
Max Working Height (m) I	8.1	9.2	10.0	12.1	13.0	14.3	16.2	18.0	20.0
Rated Load (kg)	200	200	200	200	200	200	150	150	150
Stored Dimensions (m) A*B*C	1.6x0.86x1.8	1.6x0.86x2.0	1.6x0.86x2.0	1.8x0.86x2.0	1.8x0.86x2.0	1.8x0.86x2.1	2.0x0.90x2.8	2.0x0.90x2.8	2.4x1.24x2.1
Platform Dimensions (m) E*F*G	1.5x0.7x1.1	1.5x0.7x1.1	1.5x0.7x1.1	1.7x0.7x1.1	1.7x0.7x1.1	1.7x0.7x1.1	1.9x0.7x1.1	1.9x0.7x1.1	2.0x0.8x1.1
Outriggers Foot-Pint (m) K*J	1.6 x 2.3	1.6 x 2.3	1.6 x 2.3	2.1 x 3.1	2.1 x 3.1	2.4 x 3.4	2.4 x 2.8	2.4 x 2.8	2.9 x 3.8
Voltage AC/DC Model (V)	230/12	230/12	230/12	230/12	230/12	230/12	230/12	230/12	230
Total Weight AC/DC Model (kg)	500/542	540/582	580/622	620/662	680/722	755/797	1386/1470	1420/1504	2380
Power Rating AC/DC Model (kW) (Hydraulic Motor)	1.1/1.6	1.1/1.6	1.1/1.6	1.1/1.6	1.1/1.6	1.1/1.6	1.1/1.6	1.1/1.6	1.5 + 2.5

\* Two person capacity - Max working height 14.3m (UT20 - UT40)

The Company reserves the right to make changes to products design and functions without any prior notice.  
Version 2017.02